


Split Air Conditioner - Inverter Series

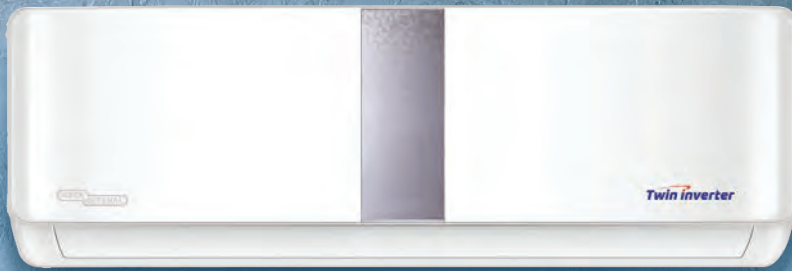

KEY FEATURES

- ▶ Auto Restart
- ▶ On/Off Timer
- ▶ Night Display Off Function
- ▶ Hidden Display
- ▶ Auto Leakage Detection
- ▶ Follow me
- ▶ Sleep Mode
- ▶ 4 Way Swing
- ▶ Gold Fin
- ▶ High Density filter
- ▶ Memory Function
- ▶ Self Clean

SGS127i5

SGS187i5

SGS247i5

SGS317i5

Specifications

Rated T1 Capacity (Btu/h)	12000	18000	24000	30000
Compressor Type / Climate Type	Inverter/T3	Inverter/T3	Inverter/T3	Inverter/T3
Refrigerant Type	R410a	220-240V, 50Hz, 1Ph R410a	220-240V, 50Hz, 1Ph R410a	220-240V, 50Hz, 1Ph R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod / Pack WxDxH mm)	802x189x297-875x285x375	880x226x335-1155x315x415	1080x226x335-1155x315x415	1259x282x362-1340x450x380
Dimension (Outdoor-Prod / Pack WxDxH mm)	800x333x554-920x390x688	845x363x702-965x395x765	946x410x810-1090x500x875	946x410x810 / 1090x500x875
Weight (Indoor) (Net /Gross Kg)	8.7 / 11.1	13.5 / 17.1	13.8 / 17.4	20 / 25.9
Weight (Outdoor) (Net /Gross Kg)	37.3 / 39.9	41.4 / 44.6	59.6 / 65.4	64.1 / 69.3
Stuffing (40'HC Units)	215	152	108	88



KEY FEATURES

- ▶ Auto Restart
- ▶ On/Off Timer
- ▶ Hidden Display
- ▶ Follow me
- ▶ Sleep Mode
- ▶ 4 Way Swing
- ▶ Gold Fin
- ▶ Self Clean
- ▶ Night Display Off Function
- ▶ Auto Leakage Detection
- ▶ High Density filter
- ▶ Memory Function

SGS337i5

Specifications

Rated T1 Capacity (Btu/h)	33000
Compressor Type / Climate Type	Inverter/T3
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Refrigerant Type	R410a
Dimension (Indoor-Prod / Pack WxDxH mm)	1350x272x365-1475x375x460
Dimension (Outdoor-Prod / Pack WxDxH mm)	946x420x810-1090x500x875
Weight (Indoor) (Net /Gross Kg)	21.3 / 27.6
Weight (Outdoor) (Net /Gross Kg)	64.8 / 70.1
Stuffing (40'HC Units)	88

KEY FEATURES

- ▶ I Feel
- ▶ Gold Fin
- ▶ Sleep Mode
- ▶ Auto-protection
- ▶ Auto-Restart
- ▶ Eco Mode
- ▶ Turbo Mode
- ▶ Led Display
- ▶ Timer
- ▶ Four Way Swing
- ▶ Intelligent Defrost




Specifications

	SGS181i5	SGS241i5
Rated T1 capacity	18000	23000
Compressor Type / Climate Type	Inverter / T3	Inverter / T3
Refrigerant Type	R410a	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor - Prod / Pack WxDxH)	1095x235x327 / 1160x303x393	1095x235x327 / 1160x303x393
Dimension (Outdoor - Prod / Pack WxDxH)	853x349x602 / 890x385x628	953x433x808 / 1020x475x845
Weight (Indoor - Net/Gross Kg)	14.5 / 18.5	14.5 / 18.5
Weight (Outdoor - Net/Gross Kg)	34 / 39	59 / 68
Stuffing (40HC Units)	184	120

KEY FEATURES

- ▶ I Feel
- ▶ Gold Fin
- ▶ Sleep Mode
- ▶ Auto-protection
- ▶ Auto-Restart
- ▶ Eco Mode
- ▶ Turbo Mode
- ▶ Led Display
- ▶ Timer
- ▶ Four Way Swing
- ▶ Intelligent Defrost

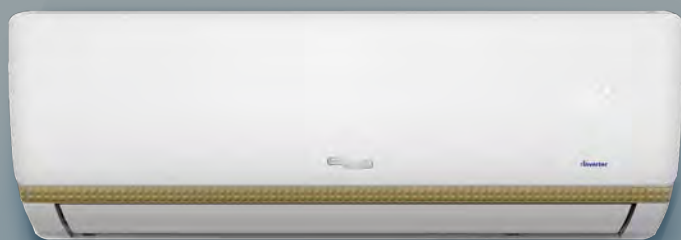

SGS121-i5

Specifications

Rated T1 capacity	12000
Compressor Type / Climate Type	Inverter / T3
Refrigerant Type	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Indoor - Prod / Pack WxDxH)	820x210x306 / 885x278x366
Dimension (Outdoor - Prod / Pack WxDxH)	817x328x553 / 858x356x585
Weight (Indoor - Net/Gross Kg)	8.5 / 11.5
Weight (Outdoor - Net/Gross Kg)	29 / 34
Stuffing (40HC Units)	242

Split Air Conditioner - Reciprocating Series



KEY FEATURES

- ▶ Auto Restart
- ▶ Sleep Mode
- ▶ Auto Leakage Detection
- ▶ On/Off timer
- ▶ 4 way swing
- ▶ Follow me function
- ▶ Night display OFF function
- ▶ Gold fin
- ▶ Memory function
- ▶ Hidden Display
- ▶ High density filter
- ▶ Self Clean

SGS370HE

Specifications

Rated T1 Capacity (Btu/h)	36000
Compressor Type / Climate Type	Reciprocating /T3
Refrigerant Type	R22
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	1259x282x362 / 1240x380x450
Dimension (Outdoor-Prod/Pack WxDxH mm)	946x410x810 / 1090x500x875
Weight (Indoor) (Net /Gross Kg)	20.5 / 26.0
Weight (Outdoor) (Net /Gross Kg)	73.4 / 79.1
Stuffing (40'HC Units)	94

ALSO AVAILABLE

	SGS191HE	SGS260HE	SGS320HE
Specifications			
Rated T1 Capacity (Btu/h)	18000	24000	32000
Compressor Type / Climate Type	Reciprocating /T3	Reciprocating /T3	Reciprocating /T3
Refrigerant Type	R22	R22	R22
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	965x215x319 / 1045x305x405	1080x226x335 / 1155x415x315	1259x282x362 / 1340x380x450
Dimension (Outdoor-Prod/Pack WxDxH mm)	845x363x702 / 965x395x765	845x363x702 / 965x395x765	946x410x810 / 1090x500x875
Weight (Indoor) (Net /Gross Kg)	11.6 / 14.8	14 / 17.5	20.5 / 26.0
Weight (Outdoor) (Net /Gross Kg)	52.6 / 55.7	55.1 / 58.2	70 / 75
Stuffing (40'HC Units)	160	152	94



KEY FEATURES

- ▶ Self Clean
- ▶ Auto Leakage Detection
- ▶ Follow Me
- ▶ Turbo Mode
- ▶ Auto Restart
- ▶ Sleep Mode
- ▶ 4 Way Swing
- ▶ Gold Fin
- ▶ Hidden Display

SGS320-4GE

Specifications

Rated T1 Capacity (Btu/h)	30000
Compressor Type / Climate Type	Reciprocating/T3
Refrigerant Type	R410A
Voltage (V, Hz, Ph)	220-240V~50Hz- 1Ph
Dimension (Indoor- Prod / Pack WxDxH mm)	1259x282x362 - 1340x380x450
Dimension (Outdoor- Prod / Pack WxDxH mm)	946x410x810 - 1090x500x875
Weight (Indoor) (Net /Gross Kg)	19.8 / 26
Weight (Outdoor) (Net /Gross Kg)	77.3 /86.2
Stuffing (40'HC Units)	96



ALSO AVAILABLE

	SGS191-4GE	SGS260-4GE
Specifications		
Rated T1 Capacity (Btu/h)	20000	24200
Compressor Type / Climate Type	Reciprocating / T3	Reciprocating / T3
Refrigerant Type	R410A	R410A
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V~50Hz, 1Ph
Dimension (Indoor-Prod / Pack WxDxH mm)	1080x226x335 / 1155x315x415	1080x226x335 / 1155x315x415
Dimension (Outdoor-Prod / Pack WxDxH mm)	845x363x702 / 965x395x765	946x410x810 / 1090x500x875
Weight (Indoor) (Net /Gross Kg)	13.7 / 17.4	13.9 / 17.6
Weight (Outdoor) (Net /Gross Kg)	59.2 / 62.4	74.1 / 78.6
Stuffing (40'HC Units)	152	108

Split Air Conditioner - Reciprocating Series



- ▶ I Feel
- ▶ Gold Fin
- ▶ Sleep Mode
- ▶ Auto-Restart
- ▶ Turbo Mode
- ▶ 4 Way Swing
- ▶ Healthy Filter
- ▶ 2 way Draining
- ▶ Hidden Display



SGS259-4GE

Specifications

Rated T1 Capacity (Btu/h)	25,000
Compressor Type / Climate Type	Reciprocating/T3
Refrigerant Type	R410A
Voltage (V, Hz, Ph)	220-240V~50Hz, 1Ph
Dimension (Indoor- Prod / Pack WxDxH mm)	1186x260x340 / 1262x337x420
Dimension (Outdoor- Prod / Pack WxDxH mm)	953x433x808 / 1020x475x845
Weight (Indoor) (Net /Gross Kg)	19 / 23
Weight (Outdoor) (Net /Gross Kg)	62 / 68
Stuffing (40'HC Units)	103



ALSO AVAILABLE

	SGS199-4GE	SGS311-4GE
Specifications		
Rated T1 Capacity (Btu/h)	18,000	30,000
Compressor Type / Climate Type	Reciprocating/T3	Reciprocating/T3
Refrigerant Type	R410A	R410A
Voltage (V, Hz, Ph)	220-240V~50Hz- 1Ph	220-240V~50Hz- 1Ph
Dimension (Indoor- Prod / Pack WxDxH mm)	1020x220x315 / 1096x297x390	1186x260x340 / 1262x337x420
Dimension (Outdoor- Prod / Pack WxDxH mm)	920x380x699 / 960x430x732	953x433x808 / 1020x475x845
Weight (Indoor) (Net /Gross Kg)	13 / 16	24 / 31
Weight (Outdoor) (Net /Gross Kg)	45 / 51	72 / 81
Stuffing (40'HC Units)	148	103

Split Air Conditioner - Rotary Series



KEY FEATURES

- ▶ 4 Way Swing
- ▶ Sleep Mode
- ▶ Follow Me
- ▶ Auto Restart
- ▶ Gold Fin
- ▶ 2 Way Draining
- ▶ Self Clean
- ▶ Auto Leakage Detection
- ▶ Turbo Mode



SGS195NE

SGS245NE

SGS315NE

SGS365NE

Specifications

Rated T1 Capacity (Btu/h)	18000	22000	27140	33000
Compressor Type / Climate Type	Rotary / T3	Rotary / T3	Rotary / T3	Rotary / T3
Refrigerant Type	R410A	R410A	R410A	R410A
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	1080x226x336 / 1155x315x415	1080x226x336 / 1155x315x415	1259x282x362 / 1340x380x450	1259x282x362 / 1340x380x450
Dimension (Outdoor-Prod/Pack WxDxH mm)	805x330x554 / 915x370x615	890x342x673 / 995x398x740	946x410x810 / 1090x500x875	946x410x810 / 1090x500x875
Weight (Indoor) (Net /Gross Kg)	14.9 / 18.6	14.9 / 18.7	21.7 / 25.7	19.8 / 25.3
Weight (Outdoor) (Net /Gross Kg)	39.5 / 42.3	47 / 50.6	61.5 / 67.9	65.3 / 70.4
Stuffing (40'HC Units)	190	154	94	94

Split Air Conditioner - Rotary Series



KEY FEATURES

- ▶ I Feel
- ▶ Gold Fin
- ▶ Sleep Mode
- ▶ Hidden Display
- ▶ Auto-Restart
- ▶ Eco Mode
- ▶ Turbo Mode
- ▶ Timer
- ▶ Sleep Mode
- ▶ Auto-Protection
- ▶ Four Way Swing

Specifications



	SGS181NE	SGS249NE
Rated T1 Capacity (Btu/h)	17200	22000
Compressor Type / Climate Type	Rotary / T3	Rotary/T3
Refrigerant Type	R410A	R410A
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	1015x221x313 / 1086x293x378	1132x229x332 / 1202x302x402
Dimension (Outdoor-Prod/Pack WxDxH mm)	853x349x602 / 890x385x628	920x380x699 / 960x430x732
Weight (Indoor) (Net /Gross Kg)	12.5 / 15.5	15.5 / 19.5
Weight (Outdoor) (Net /Gross Kg)	35 / 40	45 / 52
Stuffing (40'HC Units)	175	135



KEY FEATURES

- ▶ I Feel
- ▶ Gold Fin
- ▶ Sleep Mode
- ▶ Hidden Display
- ▶ Sleep Mode
- ▶ Auto-Protection
- ▶ Auto-Restart
- ▶ Eco Mode
- ▶ Turbo Mode
- ▶ Timer
- ▶ Four Way Swing

Specifications



	SGS121NE
Rated T1 Capacity (Btu/h)	11630
Compressor Type / Climate Type	ROTARY /T3
Refrigerant Type	R410A
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	811x203x292 - 885x278x366
Dimension (Outdoor-Prod/Pack WxDxH mm)	754x300x552 -798x321x575
Weight (Indoor) (Net /Gross Kg)	9/11
Weight (Outdoor) (Net /Gross Kg)	28/32
Stuffing (40'HC Units)	256




KEY FEATURES

- ▶ 4 Way Swing
- ▶ Sleep Mode
- ▶ Follow Me
- ▶ Auto Restart
- ▶ Gold Fin
- ▶ 2 Way Draining
- ▶ Self Clean
- ▶ Auto Leakage Detection
- ▶ Turbo Mode

SGS366GE

Specifications



Rated T1 Capacity (Btu/h)	31400
Compressor Type / Climate Type	Rotary/T3
Refrigerant Type	R410A
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	1259x282x362/1340x380x450
Dimension (Outdoor-Prod/Pack WxDxH mm)	946x410x810/1090x500x875
Weight (Indoor) (Net /Gross Kg)	19.8/25.6
Weight (Outdoor) (Net /Gross Kg)	68.5/73.2
Stuffing (40'HC Units)	94



ALSO AVAILABLE

	SGS136GE	SGS196GE	SGS256GE	SGS316GE
Specifications				
Rated T1 Capacity (Btu/h)	12000	18000	23200	28000
Compressor Type / Climate Type	Rotary / T3	Rotary / T3	Rotary / T3	Rotary / T3
Refrigerant Type	R410A	R410A	R410A	R410A
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	802x189x297/875x285x375	1080x226x335/1155x315x415	1080x226x335/1155x315x415	1259x282x362/1340x380x450
Dimension (Outdoor-Prod/Pack WxDxH mm)	770x300x555/900x345x585	890x342x673/995x398x740	890x342x673/995x398x740	946x410x810/1090x500x875
Weight (Indoor) (Net /Gross Kg)	9.0/10.8	14.9/18.5	13.8/17.4	19.8/25.3
Weight (Outdoor) (Net /Gross Kg)	34.0/36.3	46.2/49.5	50.4/53.6	66/69.9
Stuffing (40'HC Units)	230	154	154	94

Split Air Conditioner - Rotary Series



KEY FEATURES

- ▶ I Feel
- ▶ Gold Fin
- ▶ Sleep Mode
- ▶ Auto-Restart
- ▶ Eco Mode
- ▶ Turbo Mode
- ▶ Timer
- ▶ Four Way Swing



Specifications


	<u>SGS181-4GE</u>	<u>SGS249-4GE</u>
Rated T1 Capacity (Btu/h)	18000	22000
Compressor Type / Climate Type	Rotary / T3	Rotary / T3
Refrigerant Type	R410A	R410A
Voltage (V, Hz, Ph)	220-240V~50Hz- 1Ph	220-240V~50Hz- 1Ph
Dimension (Indoor - Prod / Pack WxDxH)	1132x229x332 / 1202x302x402	1132x229x332 / 1202x302x402
Dimension (Outdoor - Prod / Pack WxDxH)	920x380x699 / 960x430x732	953x433x808 / 1020x475x845
Weight (Indoor - Net/Gross Kg)	15 / 19	15 / 19
Weight (Outdoor - Net/Gross Kg)	43 / 48	57 / 66
Stuffing (40°HC Units)	148	110



Split Air Conditioner - T1 Series



For Export Only

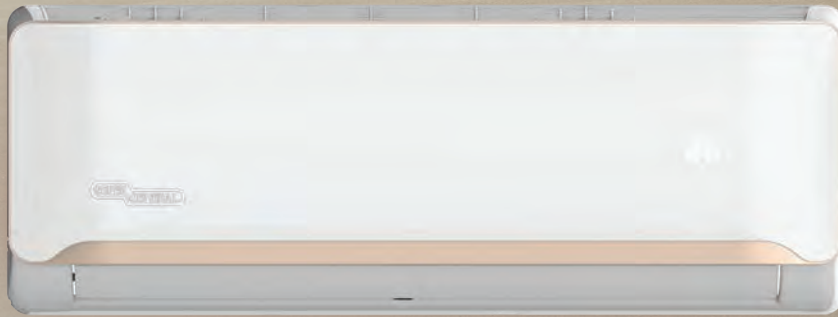

KEY FEATURES

- ▶ Follow Me
- ▶ 2-way Draining
- ▶ Self Clean
- ▶ Sleep Mode
- ▶ High Density Filter
- ▶ Auto-restart
- ▶ Memory Function
- ▶ On/off Timer
- ▶ Hidden Display
- ▶ Auto Leakage Detection
- ▶ Turbo Mode
- ▶ Night Display Off Function

SGST1206 Cool Only

Specifications

Rated T1 Capacity (Btu/h)	12000
Compressor Type / Climate Type	ROTARY/T1
Refrigerant Type	R22
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	802x189x297 / 875x285x380
Dimension (Outdoor-Prod/Pack WxDxH mm)	700x275x550 / 815x325x625
Weight (Indoor) (Net /Gross Kg)	8.5 / 10.9
Weight (Outdoor) (Net /Gross Kg)	25.2/27.4
Stuffing (40°C Units)	250



ALSO AVAILABLE

Specifications	SGST1204 / SGST1204R	SGST1804 / SGST1804R	SGST2404 / SGST2404R
	<small>Cool Only</small> <small>Heat & Cool</small>	<small>Cool Only</small> <small>Heat & Cool</small>	<small>Cool Only</small> <small>Heat & Cool</small>
Rated T1 Capacity (Btu/h)	12000	18000	24000
Compressor Type / Climate Type	ROTARY/T1	ROTARY/T1	ROTARY/T1
Refrigerant Type	R410a	R410a	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	802x189x297 / 875x285x380	845x363x702 / 965x395x775	1080x226x335 / 1155x320x415
Dimension (Outdoor-Prod/Pack WxDxH mm)	720x270x495 / 835x300x540	770x300x555 / 900x348x625	845x363x702 / 965x395x755
Weight (Indoor) (Net /Gross Kg)	9.1/11.6 - 8.8 / 11.0	12 / 15 - 11.6 / 14.8	14 / 17.5
Weight (Outdoor) (Net /Gross Kg)	26.2/28.2 - 31.2/33.5	46.5/49.5 - 37.7/40	50.6 / 53.8
Stuffing (40°C Units)	230 / 230	150 / 200	145 / 145

Split Air Conditioner - T1 Series



For Export Only

KEY FEATURES

- ▶ I Feel
- ▶ Timer
- ▶ Gold Fin
- ▶ Sleep Mode
- ▶ Hidden Display
- ▶ Auto-Protection
- ▶ Auto-Restart
- ▶ Eco Mode
- ▶ Turbo Mode
- ▶ 4 way Swing

SGST905 Cool Only

Specifications

Rated T1 Capacity (Btu/h)	9000
Compressor Type / Climate Type	Rotary/T1
Refrigerant Type	R22
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	698x190x255 / 762x269x323
Dimension (Outdoor-Prod/Pack WxDxH mm)	600x230x500 / 705x320x550
Weight (Indoor) (Net /Gross Kg)	6/8
Weight (Outdoor) (Net /Gross Kg)	20/24
Stuffing (40'HC Units)	355



ALSO AVAILABLE

Specifications	SGST1205 / SGST1205R	SGST1805 / SGST1805R	SGST2405 / SGST2405R
	<small>Cool Only</small> <small>Heat & Cool</small>	<small>Cool Only</small> <small>Heat & Cool</small>	<small>Cool Only</small> <small>Heat & Cool</small>
Rated T1 Capacity (Btu/h)	12000	18000	24000
Compressor Type / Climate Type	Rotary/ T1	Rotary / T1	Rotary / T1
Refrigerant Type	R22	R22	R22
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	777x201x250 / 840x260x315	910x205x292 / 977x275x370	1020x220x315 / 1094x294x391
Dimension (Outdoor-Prod/Pack WxDxH mm)	777x290x498 / 818x325x520	760x256x550 / 863x361x590	820x300x605 / 920x402x635
Weight (Indoor) (Net /Gross Kg)	7 / 10	10 / 13	13 / 16
Weight (Outdoor) (Net /Gross Kg)	24 / 28	35 / 40	45 / 52
Stuffing (40'HC Units)	310	235	184

Split Air Conditioner - T1 Series



For Export Only



KEY FEATURES

- ▶ I Feel
- ▶ Timer
- ▶ Gold Fin
- ▶ Sleep Mode
- ▶ Hidden Display
- ▶ Auto-protection
- ▶ Auto-restart
- ▶ Eco Mode
- ▶ Turbo Mode
- ▶ 4 Way Swing

Cool Only Heat & Cool

SGST903/ SGST903ER

Specifications

Rated T1 Capacity (Btu/h)	9000
Compressor Type / Climate Type	ROTARY / T1
Refrigerant Type	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	698x190x255 / 762x269x323
Dimension (Outdoor-Prod/Pack WxDxH mm)	600x232x500 / 705x300x550
Weight (Indoor) (Net /Gross Kg)	6/8
Weight (Outdoor) (Net /Gross Kg)	20/24
Stuffing (40'HC Units)	335 / 355



ALSO AVAILABLE

	SGST1203 / SGST1203ER Cool Only Heat & Cool	SGST1803 / SGST1803ER Cool Only Heat & Cool	SGST2403 / SGST2403ER Cool Only Heat & Cool
Specifications			
Rated T1 Capacity (Btu/h)	12000	18000	24000
Compressor Type / Climate Type	Rotary / T1	Rotary / T1	Rotary / T1
Refrigerant Type	R410a	R410a	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	777x205x250 / 850x275x320	910x205x292 / 979x277x372	1010x220x315 / 1096x297x390
Dimension (Outdoor-Prod/Pack WxDxH mm)	754x300x552 / 798x356x575	835x360x605 / 883x394x645	886x357x605 / 910x392x633
Weight (Indoor) (Net /Gross Kg)	8 / 11	11 / 14	13 / 16
Weight (Outdoor) (Net /Gross Kg)	25 / 30	35 / 40	42 / 49
Stuffing (40'HC Units)	275	200 / 230	184

Split Air Conditioner-T1 Inverter Series

For Export Only



KEY FEATURES

- ▶ I Feel
- ▶ Sleep Mode
- ▶ Turbo Mode
- ▶ Timer
- ▶ Hidden Display
- ▶ Intelligent Defrost
- ▶ Gold Fin
- ▶ Auto-protection
- ▶ Heat And Cool Model
- ▶ Auto-restart
- ▶ Eco Mode

SGST945i

Specifications

Rated T1 Capacity (Btu/h)	9000
Compressor Type / Climate Type	Inverter / T1
Refrigerant Type	R410A
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	698x190x255 / 762x269x323
Dimension (Outdoor-Prod/Pack WxDxH mm)	700x256x550 / 803x361x600
Weight (Indoor) (Net /Gross Kg)	7 / 9
Weight (Outdoor) (Net /Gross Kg)	27 / 32
Stuffing (40°HC Units)	293



ALSO AVAILABLE

	SGST1245i	SGST1845i	SGST2445i
Specifications			
Rated T1 Capacity (Btu/h)	12000	18000	24000
Compressor Type/Climate Type	Inverter / T1	Inverter / T1	Inverter / T1
Refrigerant Type	R410a	R410a	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Indoor-Prod/Pack WxDxH mm)	782x196x250 / 848x277x318	910x205x292 / 977x276x367	1020x220x315 / 1094x294x391
Dimension (Outdoor-Prod/Pack WxDxH mm)	700x256x550 / 803x361x600	760x256x550 / 863x361x590	820x300x605 / 950x426x640
Weight (Indoor) (Net /Gross Kg)	8.5/10.5	10/13	14/17
Weight (Outdoor) (Net /Gross Kg)	28/33	28/33	43/50
Stuffing (40°HC Units)	275	200	148

Window Air Conditioner Rotary Series



SGA25HE

Specifications

Rated T1 Capacity (Btu/h)	24000
Compressor Type / Climate Type	ROTARY/T3
Refrigerant Type	R22
Voltage (V, Hz, P)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x680x428 / 746x815x515
Weight (Net /Gross Kg)	55/60
Stuffing (40'HC Units)	225

ALSO AVAILABLE

Specifications

Rated T1 Capacity (Btu/h)	12000
Compressor Type / Climate Type	ROTARY/T3
Refrigerant Type	R22
Voltage (V, Hz, P)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	600x560x380 / 685x620x430
Weight (Net /Gross Kg)	36/39
Stuffing (40'HC Units)	342

SGA13HE

Rated T1 Capacity (Btu/h)	12000
Compressor Type / Climate Type	ROTARY/T3
Refrigerant Type	R22
Voltage (V, Hz, P)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	600x560x380 / 685x620x430
Weight (Net /Gross Kg)	36/39
Stuffing (40'HC Units)	342

SGA19HE

Rated T1 Capacity (Btu/h)	18000
Compressor Type / Climate Type	ROTARY/T3
Refrigerant Type	R22
Voltage (V, Hz, P)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x680x428 / 746x815x515
Weight (Net /Gross Kg)	52/57
Stuffing (40'HC Units)	225



SGA18CRN

Specifications

Rated T1 capacity	18000
Compressor Type / Climate Type	Rotary / T3
Refrigerant Type	R22
Remote	Yes
Voltage (V, Hz, Ph)	220-240V, 50 hz / 1Ph
Dimension (Product/Packing WxDxH)	660x680x430 / 740x795x468
Weight Net/Gross (Kg)	51 / 55
Stuffing (40HQ Units)	220

Window Air Conditioner - Rotary Series

SGA25-41HE

Specifications

Rated T1 Capacity (Btu/h)	20400
Compressor Type / Climate Type	ROTARY/T3
Refrigerant Type	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x680x428 / 815x746x515
Weight (Net /Gross Kg)	57.6 / 62.1
Stuffing (40'HC Units)	225

ALSO AVAILABLE

SGA19-41HE

Specifications

Rated T1 Capacity (Btu/h)	18000
Compressor Type / Climate Type	Rotary / T3
Refrigerant Type	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x680x428 / 815x746x515
Weight (Net /Gross Kg)	56.1 / 60.6
Stuffing (40'HC Units)	225

SGA28-41HE

Specifications

Rated T1 Capacity (Btu/h)	25000
Compressor Type / Climate Type	Rotary / T3
Refrigerant Type	R410
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	780x660x428- 915x770x510
Weight (Net /Gross Kg)	67.4/71.9
Stuffing (40'HC Units)	195



SGA18-41NE

Specifications

Rated T1 Capacity (Btu/h)	18500
Compressor Type / Climate Type	Rotary / T3
Refrigerant Type	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x680x430- 740x795x468
Weight (Net /Gross Kg)	53/57
Stuffing (40'HC Units)	220

SGA 24-41HE

Rated T1 Capacity (Btu/h)	24000
Compressor Type / Climate Type	Rotary / T3
Refrigerant Type	R410a
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x680x430 / 740x795x468
Weight (Net /Gross Kg)	56/60
Stuffing (40'HC Units)	220

Window Air Conditioner Reciprocating Series



SGA192SE1 / SGA252SE1

Specifications

Rated T1 Capacity (Btu/h)	18000 / 24000
Compressor Type / Climate Type	Reciprocating / T3
Refrigerant Type	R22
Voltage (V, Hz, Ph)	230V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x703x 424 / 705x785x460
Weight (Net /Gross Kg)	74/77 - 78/81
Stuffing (40'HC Units)	225



SGA183NE

Specifications

Rated T1 Capacity (Btu/h)	18000
Compressor Type / Climate Type	Reciprocating / T3
Refrigerant Type	R22
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x680x428 / 746x815x515
Weight (Net /Gross Kg)	61.4 / 66
Stuffing (40'HC Units)	225

SGA248NE

Rated T1 Capacity (Btu/h)	22300
Compressor Type / Climate Type	Reciprocating / T3
Refrigerant Type	R22
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	660x780x428 / 770x915x510
Weight (Net /Gross Kg)	71.4/75.7
Stuffing (40'HC Units)	195



Window Air Conditioner - T1 Series

For Export Only



SGA09-22NR

Specifications

Rated T1 Capacity (Btu/h)	9000
Compressor Type / Climate Type	Rotary / T1
Refrigerant Type	R22
Voltage (V, Hz, P)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	470x535x355 / 553x566x425
Weight (Net /Gross Kg)	25 / 29
Stuffing (40'HC Units)	502



SGA12-22NR

Specifications

Rated T1 Capacity (Btu/h)	12000
Compressor Type / Climate Type	Rotary / T1
Refrigerant Type	R22
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	600x560x380/687x620x420
Weight (Net /Gross Kg)	33/37
Stuffing (40'HC Units)	342

Floor Standing Air Conditioner

SUPER GENERAL

- ▶ Remote Control
- ▶ Easy Cleaning Panel
- ▶ Gold Fin
- ▶ Auto-Restart
- ▶ Sleep Mode

SGFS24GE

SGFS36NE

Specifications

Rated T1 Capacity (Btu/h)	24000	33000
Compressor Type / Climate Type	Rotary / T3	Rotary / T3
Refrigerant Type	R410A	R410A
Voltage (V, Hz, P)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension: Indoor Prod/Pack WxDxH mm	510x315x1705 - 655x430x1910	610x390x1925 / 765x515x2070
Dimension: Outdoor Prod/Pack WxDxH mm	946x410x810 - 1090x500x875	946x410x810 - 1090x500x875
Weight (Indoor) (Net /Gross Kg)	35.7/46.9	55.5 / 73.7
Weight (Outdoor) (Net /Gross Kg)	62/66.7	72.4 / 76.9
Stuffing (40' HC Units)	68	50



Specifications

Rated T1 Capacity (Btu/h)	48000	54000
Compressor Type / Climate Type	Scroll/T3	Scroll/T3
Voltage (V, Hz, Ph)	380-420V, 50Hz, 3Ph	380-420V, 50Hz, 3Ph
Refrigerant Type	R410A	R410A
Dimension (Indoor-Prod/Pack WxDxH mm)	610x390x1925 / 765x530x2070	610x390x1925 / 765x515x2070
Dimension (Outdoor-Prod/Pack WxDxH mm)	900x350x1170 / 1032x443x1307	952x415x1333 / 1095x495x1480
Weight (Indoor) (Net /Gross Kg)	57.2 / 75.7	56.7 / 76.1
Weight (Outdoor) (Net /Gross Kg)	89.6 / 100	112.6 / 126.6
Stuffing (40' HC Units)	45	40

SGFS48GE

SGFS60GE

Floor Standing Air Conditioner



KEY FEATURES

- ▶ Auto Restart
- ▶ Sleep Mode

Specifications

Rated T1 Capacity (Btu/h)	96000 / 120000
Compressor Type / Climate Type	SCROLL/T3
Voltage (V, Hz, Ph)	380-420V, 50Hz, 3Ph
Refrigerant Type	R410a
Dimension (Indoor-Prod/Pack WxDxH mm)	1200x518x1860/1362x582x2050 - 1200x518x1860/1362x582x2050
Dimension (Outdoor-Prod/Pack WxDxH mm)	1312x658x919/1320x730x1060 - 1260x700x980/1320x730x1060
Weight (Indoor - Outdoor Net/Gross Kg)	158/ 174 - 148/174
Weight (Outdoor) (Net /Gross Kg)	185/202 - 201/217
Stuffing (40'HC Units)	17

SGFS96HE / SGFS120HE

Rated T1 Capacity (Btu/h)	96000 / 120000
Compressor Type / Climate Type	SCROLL/T3
Voltage (V, Hz, Ph)	380-420V, 50Hz, 3Ph
Refrigerant Type	R410a
Dimension (Indoor-Prod/Pack WxDxH mm)	1200x518x1860/1362x582x2050 - 1200x518x1860/1362x582x2050
Dimension (Outdoor-Prod/Pack WxDxH mm)	1312x658x919/1320x730x1060 - 1260x700x980/1320x730x1060
Weight (Indoor - Outdoor Net/Gross Kg)	158/ 174 - 148/174
Weight (Outdoor) (Net /Gross Kg)	185/202 - 201/217
Stuffing (40'HC Units)	17

Portable Air Conditioner

SUPER GENERAL



KEY FEATURES

- ▶ 3 in 1 Portable AC - AC / Dehumidifier / Fan
- ▶ Efficient Dehumidification
- ▶ No Drip Technology
- ▶ 100% Copper Pipes
- ▶ 3 Fan speeds
- ▶ Super Low Noise
- ▶ Fan Mode
- ▶ Sleep Mode
- ▶ Water Self Evaporation
- ▶ 24 Hour Timer

SGP122T3

Specifications

Rated capacity (Btu/h)	12000
Compressor Type / Climate Type	ROTARY / T3
Refrigerant Type	R410A
Fan Speed (H/M/L - r/min) Evaporator	330/280/260
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	270x480x695 / 335x540x865
Weight (Net /Gross Kg)	28 / 32
Stuffing (40'HC Units)	456



KEY FEATURES

- ▶ Powerful Cooling
- ▶ Efficient Dehumidification
- ▶ Water Self-evaporation
- ▶ 3 Fan Speeds
- ▶ Super Low Noise
- ▶ 24 Hours Timer
- ▶ Fan Mode
- ▶ Sleep Mode
- ▶ Remote Control

SGP133T3

Specifications

Rated capacity (Btu/h)	12000
Compressor Type / Climate Type	ROTARY / T3
Refrigerant Type	R410a
Fan Speed (H/M/L - r/min) Evaporator	900/770/650
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph
Dimension (Prod/Pack WxDxH mm)	435x360x720 / 485x430x890
Weight (Net /Gross Kg)	31 / 36
Stuffing (40'HC Units)	381

Portable Air Conditioner

- ▶ 3 in 1 Portable AC - AC / Dehumidifier / Fan
- ▶ Efficient Dehumidification
- ▶ No Drip Technology
- ▶ 100% Copper Pipes
- ▶ 3 Fan speeds
- ▶ Super Low Noise
- ▶ Fan Mode
- ▶ Sleep Mode
- ▶ Water Self Evaporation
- ▶ 24 Hour Timer



SGP184T3

Specifications

Rated capacity (Btu/h)	18000
Climate Type/ Compressor Type	T3/Rotary
Refrigerant Type	R410a
Fan Speed (Hi/Med/Low - r/min) Evaporator	450 / 430 / 400
Voltage (Ph, V, Hz)	220-240V, 50Hz
Dimension (Product/Packing WxDxH)	365x568x775 / 435x720x860
Weight (Net/Gross Kg)	37 / 44
Stuffing (40HC Units)	258

- ▶ 3 in 1 Portable AC - AC / Dehumidifier / Fan
- ▶ Efficient Dehumidification
- ▶ No Drip Technology
- ▶ 100% Copper Pipes
- ▶ 3 Fan speeds
- ▶ Super Low Noise
- ▶ Fan Mode
- ▶ Sleep Mode
- ▶ Water Self Evaporation
- ▶ 24 Hour Timer



SGP124T3

Specifications

Rated capacity (Btu/h)	12000
Climate Type/ Compressor Type	T3 / Rotary
Refrigerant Type	R410a
Fan Speed (Hi/Med/Low - r/min) Evaporator	330/280/260
Voltage (Ph, V, Hz)	220-240V, 50Hz
Dimension (Product/Packing WxDxH)	309x553x840 / 319x563x865
Weight (Net/Gross Kg)	28 / 32
Stuffing (40HC Units)	440



Air Curtain

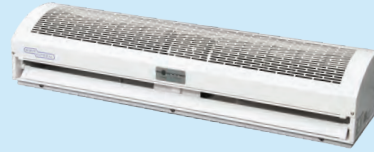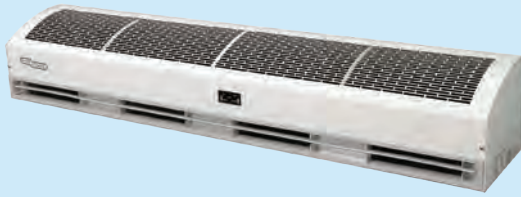

SGCTN90H

SGCTN120H

SGCTN150H

Specifications

Product	Air Curtain	Air Curtain	Air Curtain
Size (MM)	900	1200	1500
Remote	Yes	Yes	Yes
Material	Metal	Metal	Metal
Voltage (V, Hz, Ph)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Dimension (Pack HxWxD mm)	254x950x251	254x1250x251	254x1550x251
Weight (Gross Kg)	17	21	25
Stuffing (40'HC Units)	1078	826	680

Cassette Type Air Conditioners



SGCA2400SE

SGCA3600HE

SGCA4800SE

Specifications

Capacity (Btu/h)	24000	36000	48000
Compressor Type / Climate Type	Rotary / T3	Scroll / T3	Scroll / T3
Refrigerant Type	R410A	R410A	R410A
Voltage (Ph, V, Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	380-415V, 50Hz, 3Ph
Dimension (Indoor-Prod/Pack HxWxD mm)	950x950x550 / 1035x1035x900	950x950x550 / 1035x1035x900	950x950x550 / 1035x1035x900
Dimension (Outdoor-Prod/Pack HxWxD mm)	946x410x810 / 1090x500x865	900x350x1170 / 1032x443x1307	952x415x1333 / 1095x495x1480
Weight (Indoor - Outdoor - Panel) (Net /Gross Kg)	31.7 / 39.9 - 58.7 / 64.4	34.8 / 43.2 - 92.5/104.2	39.4/48.9 - 102.2/115.6
Stuffing (40'HC Units)	92	70	48

Duct Type Air Conditioners



SGDA1810HE

SGDA2410HE

SGDA3010HE

Specifications

Rated T1 capacity	18000	24000	30000
Compressor Type / Climate Type	ROTARY / T3	ROTARY / T3	TWIN-ROTARY / T3
Refrigerant Type	R410A	R410A	R410A
Voltage (V, Hz, Ph)	220-240-1-50	220-240-1-50	220-240V, 1Ph, 50Hz
Dimension (Indoor - Prod / Pack WxDxH)	880x674x210 - 1070x725x270	1100x774x249 - 1305x805x305	1200x874x300 - 1405x915x355
Dimension (Outdoor - Prod / Pack WxDxH)	845x363x702 - 965x395x765	946x410x810 - 1090x500x865	946x410x810 - 1090x500x875
Weight (Indoor - Net/Gross Kg)	25.5/31.1	31.2/37.6	44.8/53.3
Weight (Outdoor - Net/Gross Kg)	49.1/52.4	58.7/64.4	69.6/74.4
Stuffing (40°C Units)	132	105	72

Duct Type Air Conditioners



SGDA3610HE

SGDA4810HE

SGDA6010HE

Specifications

Rated T1 capacity	38820	50750	57100
Compressor Type / Climate Type	SCROLL / T3	SCROLL / T3	Scroll / T3
Refrigerant Type	R410A	R410A	R410A
Voltage (V, Hz, Ph)	220-240V, 1Ph, 50Hz	380-415V, 3Ph, 50Hz	380-415-3-50
Dimension (Indoor Prod/Pack mm)	1200x874x300 - 1405x915x355	1200x625x380 - 1485x675x450	1200x625x380 - 1485x675x450
Dimension (Outdoor Prod/Pack mm)	900x350x1170 - 1032x443x1307	952x415x1333 - 1095x495x1480	952x415x1333 - 1095x495x1480
Weight (Indoor - Net/Gross Kg)	44.4/52.7	56/64.1	56.5/64.5
Weight (Outdoor - Net/Gross Kg)	92.5/104.2	103.4/116.8	112.5/125.6
Stuffing (40'HC Units)	60	48	48

Portable Industrial Air Conditioner

SUPER GENERAL

SGIP5500
(Cooling only)



SPECIFICATIONS

Working temperature 18-45°C	Voltage /Cycle/Phase 220-240V/50Hz/1Ph	Cooling capacity 25000Btu/h	Refrigerant R410A	Weight 95kg
Power Input 3000W	Dimensions 550x600x1120mm	Outlet pipe 3 pcs	Noise 60-65db	Air Volume 900m ³ /h

FEATURES



Digital Display



Self Diagnostic Function



One Unit Solution With
Built In Compressor



R410 Environment
Friendly Refrigerant



Convenient Water Drainage System
(15L Water Tank)



Castors For Easy Mobility



High Efficient Filter



360° Curved Cold Air Pipe



No installation required